


Dimensions (mm)

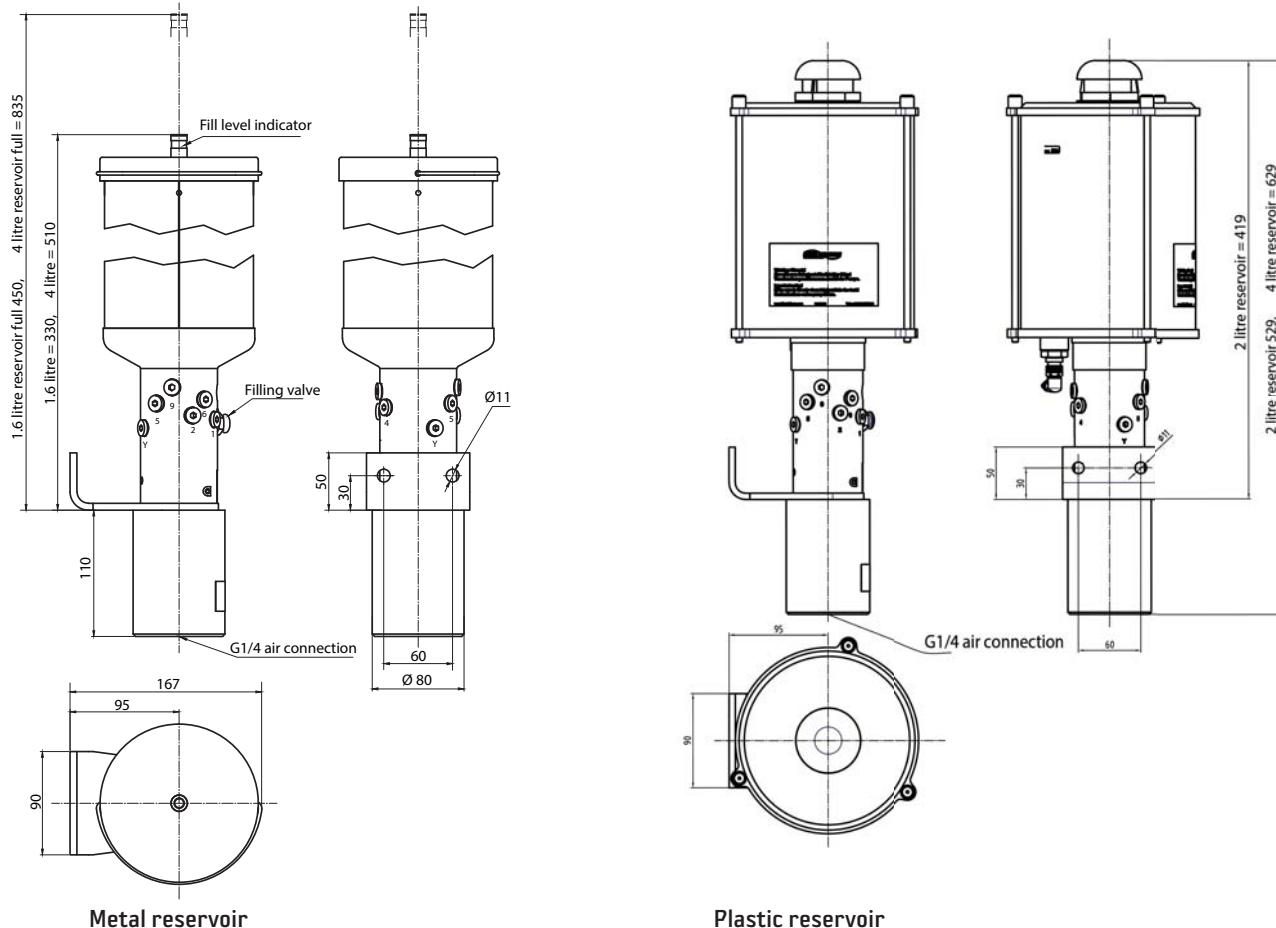

How to order

Pump type _____
TB-D pneumatically operated

Number of outlets _____
1 outlet (0.5 cm³)
2 outlets
3 outlets
4 outlets
5 outlets
6 outlets
7 outlets
8 outlets
9 outlets
1 outlet X (4.5 cm³)


Revision _____
Status

Mode of operation _____
Pneumatic

Drive position _____
without

Outlet coding _____
1.6 litre / oil / grease / with follower piston / metal reservoir with visual fill level monitoring
4.0 litre / oil / grease / with follower piston / metal reservoir with visual fill level monitoring
2.0 litre / oil / plastic reservoir without fill level monitoring
2.0 litre / oil / plastic reservoir with electric fill level monitoring
4.0 litre / oil / plastic reservoir without fill level monitoring
4.0 litre / oil / plastic reservoir with electric fill level monitoring
2.0 litre / grease / with follower piston / plastic reservoir without fill level monitoring
2.0 litre / grease / with follower piston / plastic reservoir with electric fill level monitoring
4.0 litre / grease / with follower piston / plastic reservoir without fill level monitoring
4.0 litre / grease / with follower piston / plastic reservoir with electric fill level monitoring
2.0 litre / semi-fluid grease / plastic reservoir without fill level monitoring
2.0 litre / semi-fluid grease / plastic reservoir with electric fill level monitoring
4.0 litre / semi-fluid grease / plastic reservoir without fill level monitoring
4.0 litre / semi-fluid grease / plastic reservoir with electric fill level monitoring

Accessories _____
without

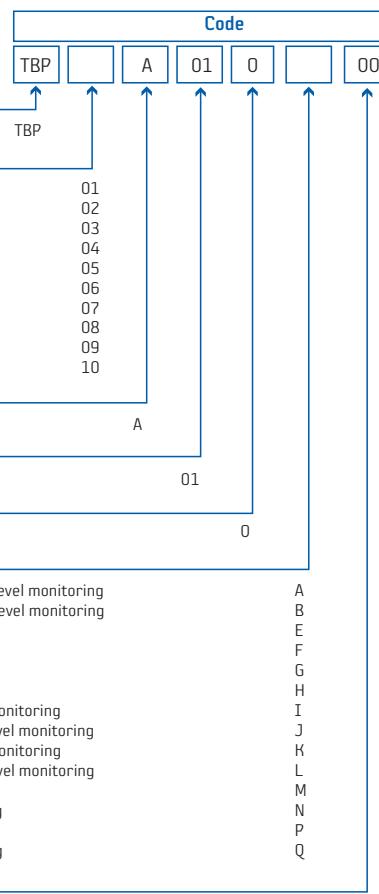

Example of order:

TBP 10 A 01 0 H 00
Pneumatic piston pump TBD,
1 outlet X (4.5 cm³), 4 litre tank,
pumping medium oil, electric fill
level monitoring

DELIMON GMBH

(+49) 211 7774-0 TELEFON
(+49) 211 7774-210 FAX

WWW.BIJURDELIMON.COM

Arminstraße 15
40227 Düsseldorf